



RECTANGLE H2™

TWIN SERIES

LED Hazardous Location Lighting

The hazardous location Rectangle series floodlight features a twin mount adjustable U-shaped bracket, designed for high vibration and corrosion environments. Using high-efficiency LEDs delivering 160 lm/W with outputs ranging from 48,000 to 64,000, making it the obvious reliable choice for all challenging and hazardous location environments.


Compliance

NEC/CEC Standard

UL 844 Hazardous Locations
Class I Division 2, Groups A, B, C, D
Class II Division 1, Groups E, F, G
Class II Division 2, Groups F, G
Class III
CSA C22.2 NO.137
CSA C22.2 NO. 250.0:21
UL 1598 Wet Locations
UL 1598A Marine Outside Type (Salt Water) !
UL 8750 LED Safety
IP66
IK09
NEMA 4X

Dimensions

unit: mm(in)

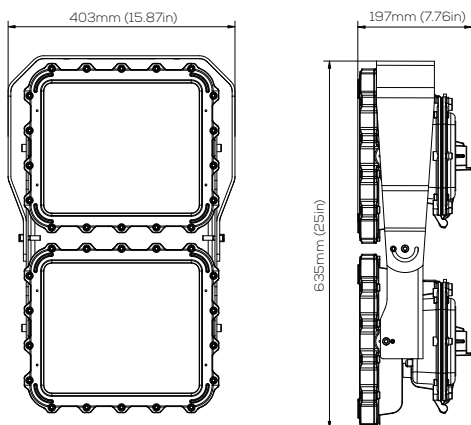

Technical Data

Electrical

Rated Power	300W / 400W
Input Voltage	100-277, 347-480V/AC
Input Frequency	50/60Hz
Power Factor	> 0.95
Driver Efficiency	≥ 90%
DC output Ripple & Noise	<200mVP-P

Optical

Lumen Output	48,000lm ~ 64,000lm
Luminous Efficacy (Lumens per Watt)	160 lm/W
Beam Angle	30° / 60° / 90° / 110° / T2 / T3 / T4
Correlated Color Temperature (CCT)	3000K 4000K 5000K
CRI	Ra>70

Environmental

Ambient Operating Temperature	-40°C~+60°C
Ambient Operating Humidity	10%~90% RH
Atmospheric Pressure	86~106KPa

Technical


Lens Material	Tempered glass
Mounting Options	Angled bracket / Straight bracket
Cable Entries	3/4" NPT, 1-1/2" NPT
Net Weight	25.2kg (55.56 lbs)

Warranty

10-year limited system warranty

Lumen Maintenance: L70 > 150,000hours @ 25°C

Beam Distribution

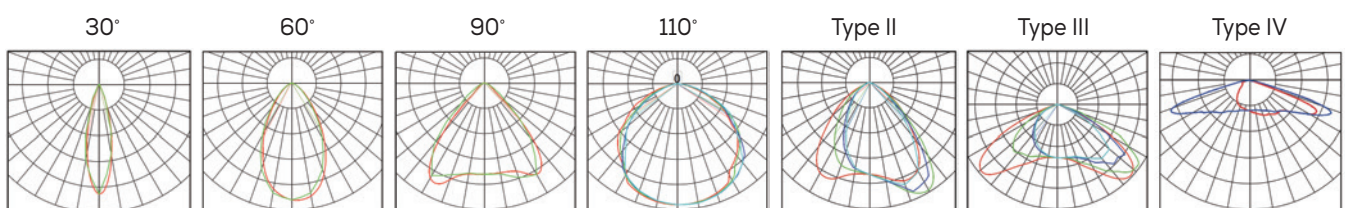

Ordering Information and Mounting Accessories

REC	300	H	2	110	5K	CG	YK	GR	XX
Model REC		Voltage L -100-277V/AC H -347-480V/AC			Color Temp 3K - 3000K (Soft white) 4K - 4000K (Neutral white) 5K - 5000K (Cool white)		Mount Style YKA - Yoke mount Bracket Angled (3/4" NPT) YK - Yoke Mount bracket Straight (3/4" NPT)		Accessories WG - Wire guard SC - Safety cable VIS - Visor SP1 - 10KV surge protector (100-277V) *Standard SP1H - 10KV surge protector (347-480V) *Standard SP2L- 20KV surge protector (100-277V) SP20H - 20KV surge protector (347-480V) PBC60 - Pipe Clamp (M8*60mm) for pole Ø 2-3/8" (60mm) CRD - 3' SE00W-18/3 Cord CG - Cable Gland 3/4" NPT PS - Pole Stanchion 2" (60mm)
Power 300- 48,000 lm (300W) 400 - 64,000 lm (400W)		Ex. Level 2 - C1D2, C2D1					Color GR - Gray		
		Optics 30 - 30° 60 - 60° 90 - 90° 110 - 110° T2 - T2 T3 - T3 T4 - T4			Lens CG - Clear glass DG - Diffuse glass				

Mounting Options



YKA
Yoke Mount Bracket
(Angled)



YK
Yoke Mount Bracket
(Straight)


Accessories



YKA
Yoke Mount Bracket
(Angled)



YK
Yoke Mount Bracket
(Straight)



WG
Stainless steel
wire guard



SC
Stainless steel
safety cable
Ø 8 (4mm)



VIS
Stainless steel
dark sky visor



CRD
3' SE00W-18/3 Cord
(Factory installed)



CGL
Cable Gland
3/4" NPT
Suitable for C1D2



PS
Pole Stanchion
2-3/8" (60mm)



10KV Surge Protector
*Standard
SP1
10KV (100-277V)
SP1H
10KV (347-480V)



20KV Surge Protector
SP2
20KV (100-277V)
SP2H
20KV (347-480V)

Classification of Divisions and Zones

Hazard Level	Division Scheme	Zone Scheme	Definitions
Continuous Hazard	Division 1	Zone 0 / Zone 20	A place in which an explosive atmosphere is continually present
Intermittent Hazard		Zone1 / Zone 21	A place in which an explosive atmosphere is likely to occur in normal operation
Hazard Under Abnormal Conditions	Division 2	Zone2 / Zone 22	A place in which an explosive atmosphere is not likely to occur in normal operation, but may occur for short periods

Hazardous Atmosphere Category

Explosive atmosphere	Typical Hazard Material	Hazard Class	Division Group	NEC 505 / CEC 18
Gases, vapors, and liquids	A: Acetylene B: Hydrogen, etc. C: Ether, etc. D: Hydrocarbons, fuels, solvents, etc.	Class I	Group A Group B Group C Group D	IIC IIC or IIB+H2 IIB IIA
Dusts	E: Metal dusts (conductive and explosive) F: Carbon dusts (some are conductive, and all are explosive) G: Flour, starch, grain, combustible plastic or chemical dust (explosive)	Class II	Group E Group F Group G	IIIC IIIC IIIB
Fibers and flyings	Textiles, wood-working, etc. (easily ignitable, but not likely to be explosive)	Class III	Not Applicable	IIIA

IP Codes

Solid Objects	Liquids
0 - No protection	0 - No special protection
1 - Objects > 50mm diameter	1 - Vertically dripping water
2 - Objects > 12.5mm diameter	2 - Vertically dripping water when enclosure tilted by 15°
3 - Objects > 2.5mm diameter	3 - Sprayed water up to 60°
4 - Objects > 1.0mm diameter	4 - Sprayed water from all directions
5 - Dust protected	5 - Water jets
6 - Dust tight	6 - Powerful water jets
	7 - Temporary submersion to a depth of 1m
	8 - Extended submersion to a depth of >1m

IK Codes

IK Code	Impact energy, J
IK01	0.14
IK02	0.2
IK03	0.35
IK04	0.5
IK05	0.7
IK06	1
IK07	2
IK08	5
IK09	10
IK10	20
IK11	50

Temperature Classification

Marking	NEC500 CEC	NEC 505 IEC-GROUP II
450°C	T1	T1
300°C	T2	
280°C	T2A	
260°C	T2B	T2
230°C	T2C	
215°C	T2D	
200°C	T3	
180°C	T3A	
165°C	T3B	T3
160°C	T3C	
135°C	T4	
120°C	T4A	T4
100°C	T5	T5
85°C	T6	T6

Zone classification and Equipment protection level (EPL)

Gas Zones	Definition	ATEX Category	EPL	Required Protection
Methane	Mines with methane and dust. Equipment remains energised in explosive atmosphere	M1	Ma	Two Faults
Methane	Mines with methane and dust. Equipment is de-energised in explosive atmosphere	M2	Mb	Severe Normal Operation
Zone 0	Explosive atmosphere present continuously or for long periods, frequently	1G	Ga	Two Faults
Zone 1	Explosive atmosphere is likely to occur under normal conditions, occasionally	2G	Gb	One Fault
Zone 2	Explosive atmosphere is unlikely to occur under normal conditions, short periods	3G	Gc	Normal Operation
Dust Zones	Definition	ATEX Category	EPL	Required Protection
Zone 20	Explosive atmosphere present continuously or for long periods, frequently	1D	Da	Two Faults
Zone 21	Explosive atmosphere is likely to occur under normal conditions, occasionally	2D	Db	One Fault
Zone 22	Explosive atmosphere is unlikely to occur under normal conditions, short periods	3D	Dc	Normal Operation